



## Roto-Compactor PS 800

**Continuous filling also during compaction operation.  
For use directly on site where the waste is generated.  
Compaction into a plastic bag.  
For the compaction of recyclable waste and residual waste.**

### Technical Details:


The continuously fillable Roto-Compactor has a specially equipped compaction drum which rotates alternating right and left. It grips, tears up and compacts the material into a 800 liter plastic bag that is protected by a steel casing and can be easily removed.

The full signal is effected by a yellow signal in the operator panel on the machine's front.

Paint on customer's request in every RAL colour.

### Serial Accessories:

- \* compaction drum: GP 800 drum
- \* filling by chute
- \* 2K-paint in RAL 6018 yellowgreen

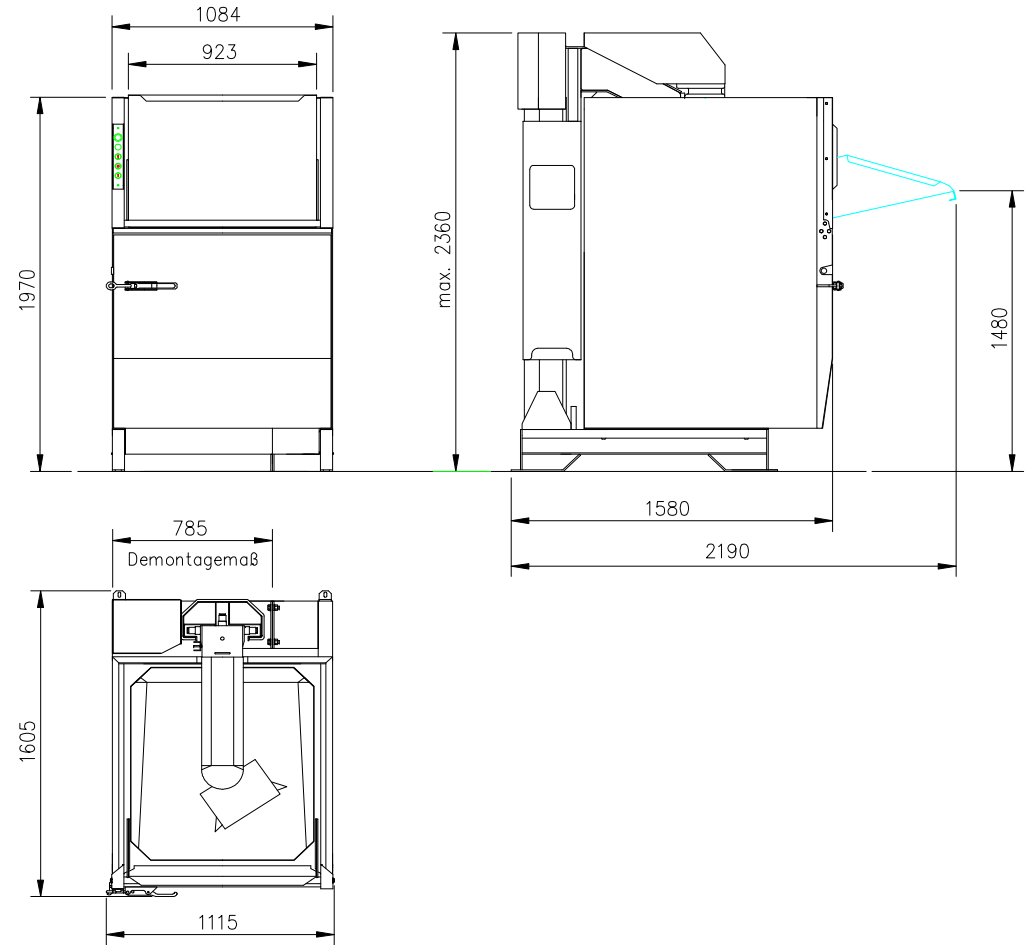

## Technical Data

All measurements are approx. measurements. Subject to changes.

power	2,2 kW
electrical connection	400 V, 50 Hz
control voltage	24 V
drum speed	18 U/min
machine weight	740 kg
noise level	76 dB

dimensions machine (width x depth x height in mm)	1115 x 1605 x 1970
bale dimensions (width x depth x height in mm)	950 x 1000 x 900 (equals to approx. 800 liter)
max. height with extended compaction unit	2360 mm resp. 2740 mm with plastic pointed roof
filling height	1520 mm (filling chute)

predecessor of Roto-Baler 1400-E