




WASTE COMPACTORS FOR ROLL-ON/OFF TRUCKS

High efficiency and the latest state of technology



■ MPC 20 P/E/L/R

Standard RAL-colours

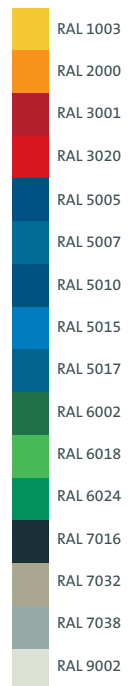

Further RAL-colours on demand at extra charge.

Go for flexibility

You will get your waste compactor optionally...

- ... with slanted or high side walls as well as with individual opening mechanisms
- ... with enlarged feed-opening ,L' to feed bulky materials
- ... with a pendulum style rear door or side rear door
- ... with integrated bin lift device
- ... with web based message system for location and filling level indication
- ... for stand-alone or ramp installation

Your advantages:

- ✓ Large feeding chute
- ✓ Solid construction
- ✓ Long life

AVERMANN Maschinenfabrik GmbH & Co. KG


Lengericher Landstr. 35 ▪ 49078 Osnabrück ▪ Germany
Tel.: +49 5405 505-0 ▪ Fax: +49 5405 6441 ▪ info@avermann.de





■ MPC 20 P/E/L/R incl. hydr. lid opener (optional)

■ MPC 20 P/E/L/R with integrated tipping shovel (optional)

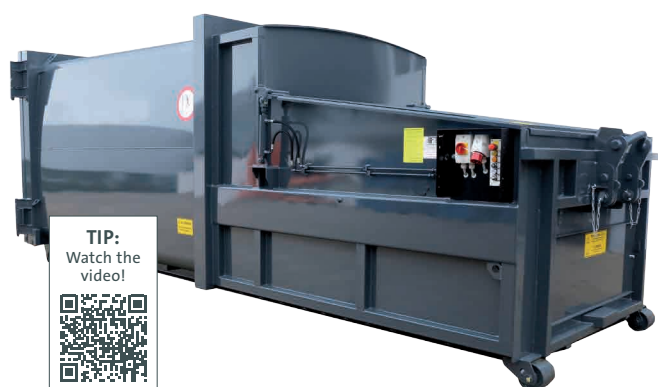

Optimum transportation and efficiency

AVERMANN waste compactors reduce household and industrial waste volumes as well as paper and other recyclable fractions to 1/6 of the original volume and thus reduce transport and disposal costs extraordinarily economical.

Moreover, extra charges arising from paper waving out from open waste bins and other containers are completely omitted. No further need for manual pre-compaction of cardboard boxes and bulky material.

Technical data

	MPC 16 P/E	MPC 16 P/E/L	MPC 20 P/E	MPC 20 P/E/L
Net capacity	16 m ³	16 m ³	20 m ³	20 m ³
Machine length*	5450 mm	5950 mm	6450 mm	6950 mm
Machine width	2500 mm	2500 mm	2500 mm	2500 mm
Machine height	2550 mm	2550 mm	2550 mm	2550 mm
Feed-opening length	1000 mm	1300 mm	1000 mm	1300 mm
Feed-opening width	1980 mm	1980 mm	1980 mm	1980 mm
Feeding height	1410 mm	1480 mm	1410 mm	1480 mm
Dead weight	4700 kg	5300 kg	4900 kg	5500 kg
Oil quantity	70 l	70 l	70 l	70 l
Capacity per drive stroke	1.3 m ³	1.9 m ³	1.3 m ³	1.9 m ³
Cycle time (idle)	43 sec	63 sec	43 sec	63 sec
Drive capacity	5.5 kW	5.5 kW	5.5 kW	5.5 kW
Press force	380 kN	380 kN	380 kN	380 kN

* with rear-hook: + 260 mm

Valid for all machine types

Electricity: 3 x 400 V, N, PE/50 Hz; Plug connector: CEE-5 x 32 A/6 h; Fuse protection (on site): 25 A, slow;
Control voltage: 24 V DC