



Roll-Matic APS 600

**Continuous filling also during compaction operation.
For use directly on site where the waste is generated.
Compaction into a 600 liter roller bin.
For the compaction of general waste and wet waste.**


Technical Details:

The continuously fillable Roll-Matic has a specially equipped compaction drum which rotates alternating right and left. It grips, tears up and compacts the material into a 600 liter galvanized steel bin that can be easily removed. The full signal is effected by a yellow signal in the operator panel on the machine's front.

Paint on customer's request in every RAL colour.

Serial Accessories:

- * compaction drum: GP 600 drum
- * filling by chute
- * 2K-paint in RAL 6018 yellowgreen

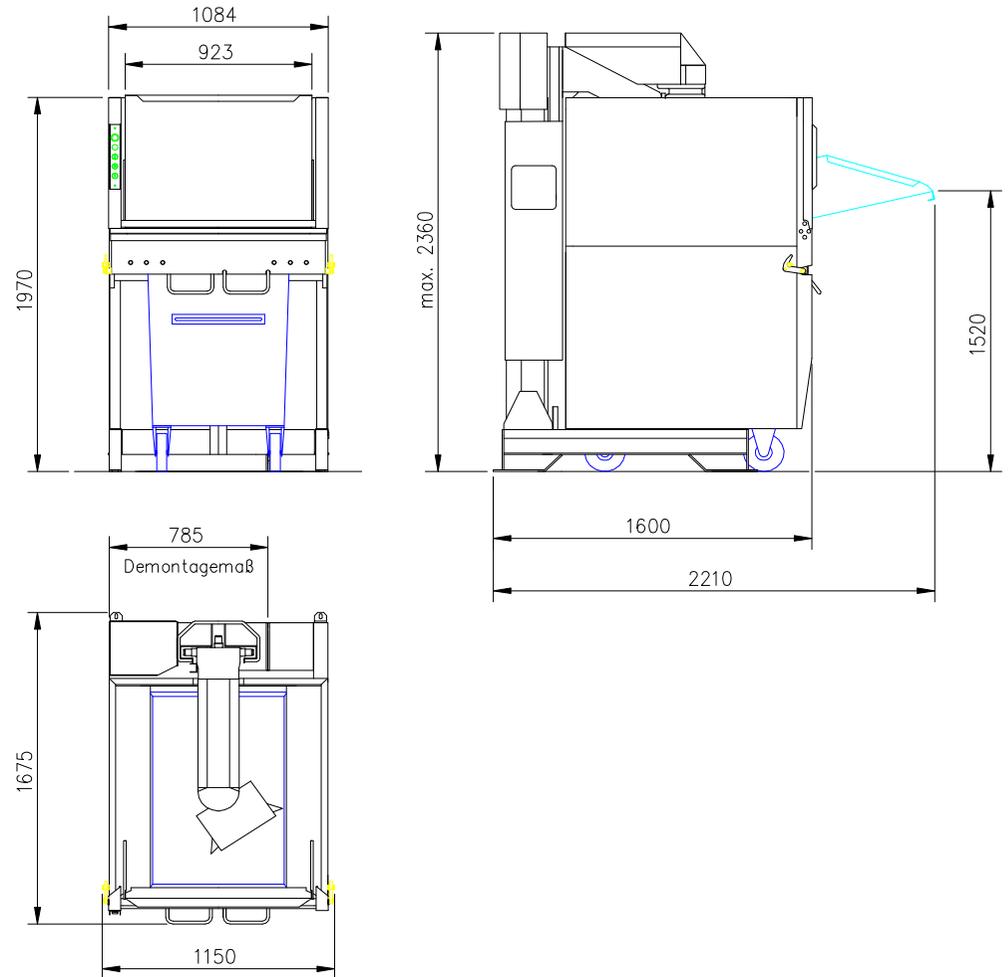

Technical Data

All measurements are approx. measurements. Subject to changes.

power	2,2 kW
electrical connection	400 V, 50 Hz
control voltage	24 V
drum speed	18 U/min
machine weight	720 kg
roller bin weight	135 kg
noise level	76 dB

dimensions machine (width x depth x height in mm)	1150 x 1600 x 1970
roller bin (width x depth x height in mm)	1350 x 770 x 1147 (capacity approx. 600 liter)
max. height with extended compaction unit	2360 mm resp. 2670 mm with plastic pointed roof
filling height	1520 mm (filling chute)

predecessor of Roto-Pack 800-E