



## Roll-Matic APS 800

**Continuous filling also during compaction operation.  
For use directly on site where the waste is generated.  
Compaction into a 800 liter roller bin.  
For the compaction of general waste and wet waste.**


### Technical Details:

The continuously fillable Roll-Matic has a specially equipped compaction drum which rotates alternating right and left. It grips, tears up and compacts the material into a 800 liter galvanized steel bin that can be easily removed. The full signal is effected by a yellow signal in the operator panel on the machine's front.

Paint on customer's request in every RAL colour.

### Serial Accessories:

- \* compaction drum: GP 800 drum
- \* filling by chute
- \* 2K-paint in RAL 6018 yellowgreen

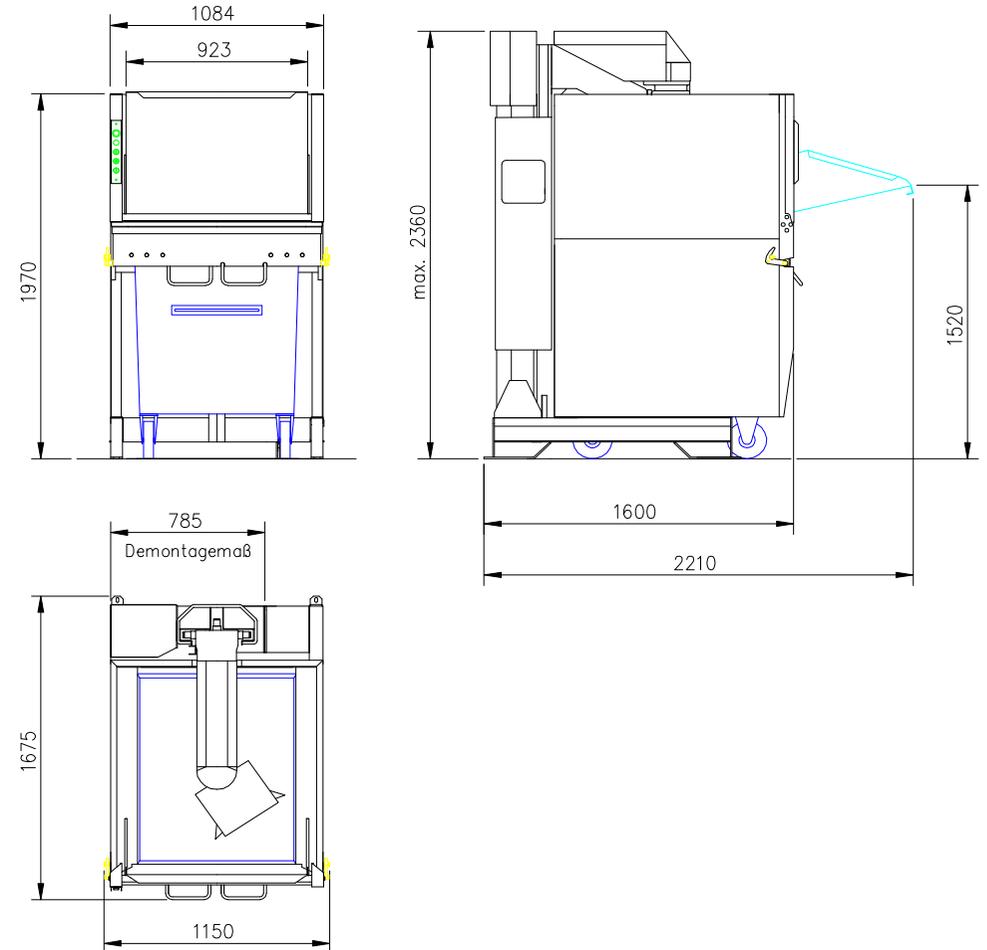

## Technical Data

All measurements are approx. measurements. Subject to changes.

power	2,2 kW
electrical connection	400 V, 50 Hz
control voltage	24 V
drum speed	18 U/min
machine weight	720 kg
roller bin weight	150 kg
noise level	76 dB

dimensions machine (width x depth x height in mm)	1150 x 1600 x 1970
roller bin (width x depth x height in mm)	1350 x 952 x 1147 (capacity approx. 800 liter)
max. height with extended compaction unit	2360 mm resp. 2670 mm with plastic pointed roof
filling height	1520 mm (filling chute)

predecessor of Roto-Pack 800-E