



Roto-Compactor PS 1200-E Typ 188

Continuous filling also during compaction operation.
For use directly on site where the waste is generated.
Compaction into a plastic bag.
For the compaction of recyclable waste and residual waste.

Technical Details:


The continuously fillable Roto-Compactor has a specially equipped compaction drum which rotates alternating right and left. It grips, tears up and compacts the material into a 1200 liter plastic bag that is protected by a steel casing and can be easily removed.

The full signal is effected by a yellow signal in the operator panel on the machine's front.

Paint on customer's request in every RAL colour.

Serial Accessories:

- * compaction drum: Power Cruncher drum
- * adapter for pallets, mounted left and right side on central mast
- * filling by faceplate
- * 2K-paint in RAL 6018 yellowgreen

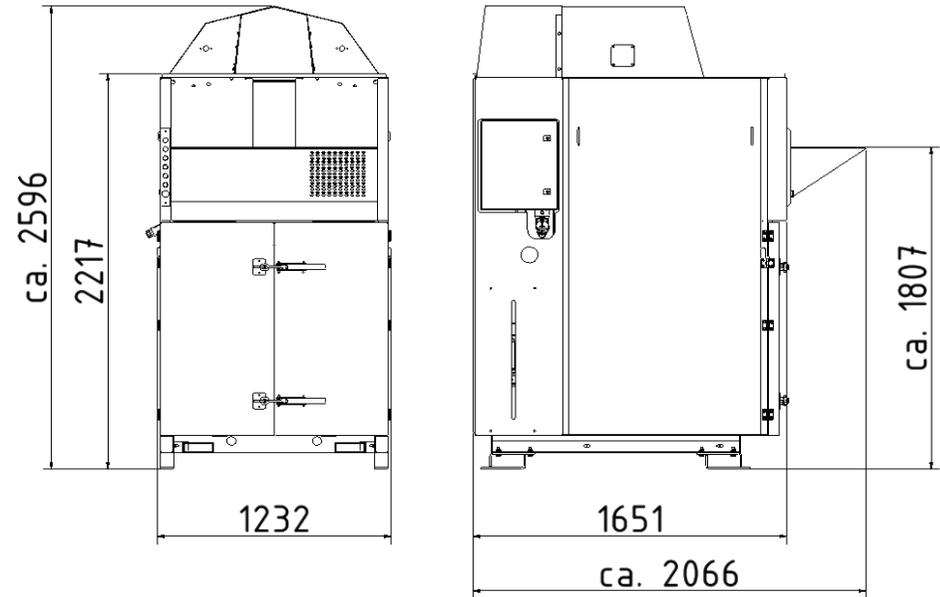

Technical Data date: 28.10.2014

All measurements are approx. measurements. Subject to changes.

power	3,0 kW
electrical connection	400V / 3phase / 50Hz +N
control voltage	24 V
drum speed	38 U/min
machine weight	1125 kg
noise level	69 dB
Pre-fuse	3 x 16A

dimensions machine (width x depth x height in mm)	1232 x 2066 x 2217 (required space min.: 1500 mm)
height with cover	2596 mm
bale dimensions (width x depth x height in mm)	1000 x 1200 x 1150 (equals to approx. 1200 liter)
max. height with extended compaction unit	2583 mm
filling height	1807 mm