



## Roto-Compactor PS 1000-E Typ 186

**Continuous filling also during compaction operation.  
For use directly on site where the waste is generated.  
Compaction into a plastic bag.  
For the compaction of recyclable waste and residual waste.**

### Technical Details:


The continuously fillable Roto-Compactor has a specially equipped compaction drum which rotates alternating right and left. It grips, tears up and compacts the material into a 1000 liter plastic bag that is protected by a steel casing and can be easily removed.

The full signal is effected by a yellow signal in the operator panel on the machine's front.

Paint on customer's request in every RAL colour.

### Serial Accessories:

- \* compaction drum: Power Cruncher drum
- \* adapter for pallets, mounted left and right side on central mast
- \* filling by faceplate
- \* 2K-paint in RAL 6018 yellowgreen

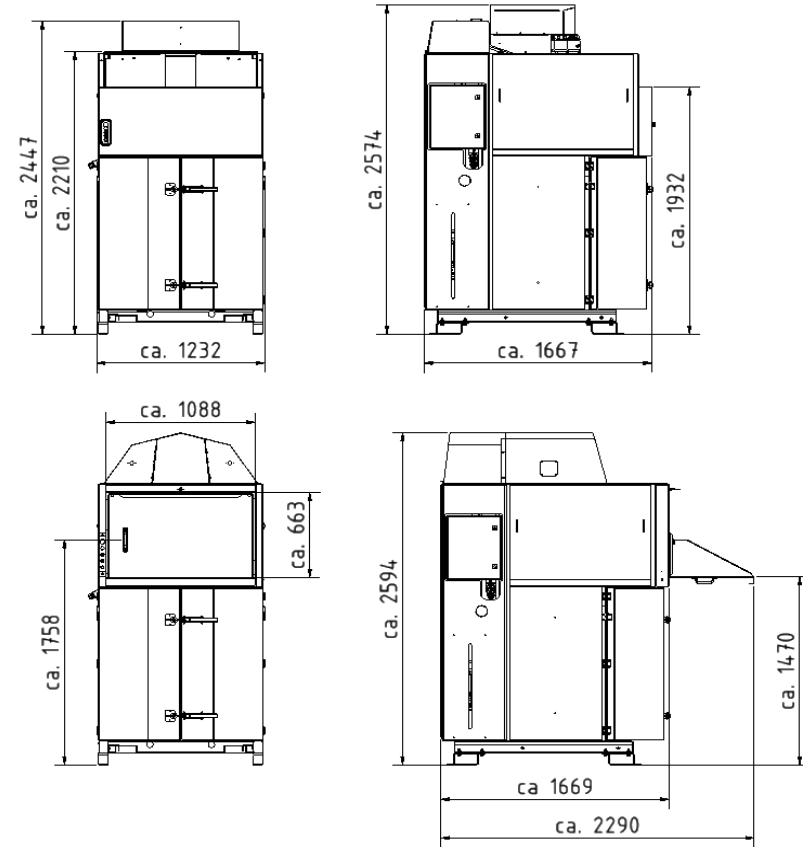

## Technical Data

All measurements are approx. measurements. Subject to changes.

power	3,0 kW	dimensions machine (width x depth x height in mm)	1232 x 1670 x 2450 (required space min.: 1470mm)
electrical connection	400V, 3phases, 50 Hz +N	bale dimensions (diameter x height in mm)	Ø 1100 x 1000 (equals to approx. 1000 liter)
control voltage	24 V	max. height with extended compaction unit	2580 mm (resp. 2600 mm with roof cover)
drum speed	22 U/min optional 35 U/min	filling height	1930 mm (faceplate, 45°-chute) resp. 1470 mm (filling chute)
machine weight	1130 kg	filling opening with accessory filling chute	670 mm x 1088 mm
noise level	69 dB		