



## Roto-Compactor PS 1400-E Type 189

**Continuous filling also during compaction operation.  
For use directly on site where the waste is generated.  
Compaction into a plastic bag.  
For the compaction of recyclable waste and residual waste.**

### Technical Details:


The continuously fillable Roto-Compactor has a specially equipped compaction drum which rotates alternating right and left. It grips, tears up and compacts the material into a 1400liter plastic bag with pallet underlaid that is protected by a steel casing it can be easily removed.

The full signal is affected by a yellow signal in the keyboard on the machine's front.

Paint on customer's request in every RAL colour.

### Serial Accessories

- \* compaction drum: Power Cruncher drum
- \* adapter for pallets, mounted left and right side on central mast
- \* filling by faceplate
- \* 2K-paint in RAL 6018 yellowgreen

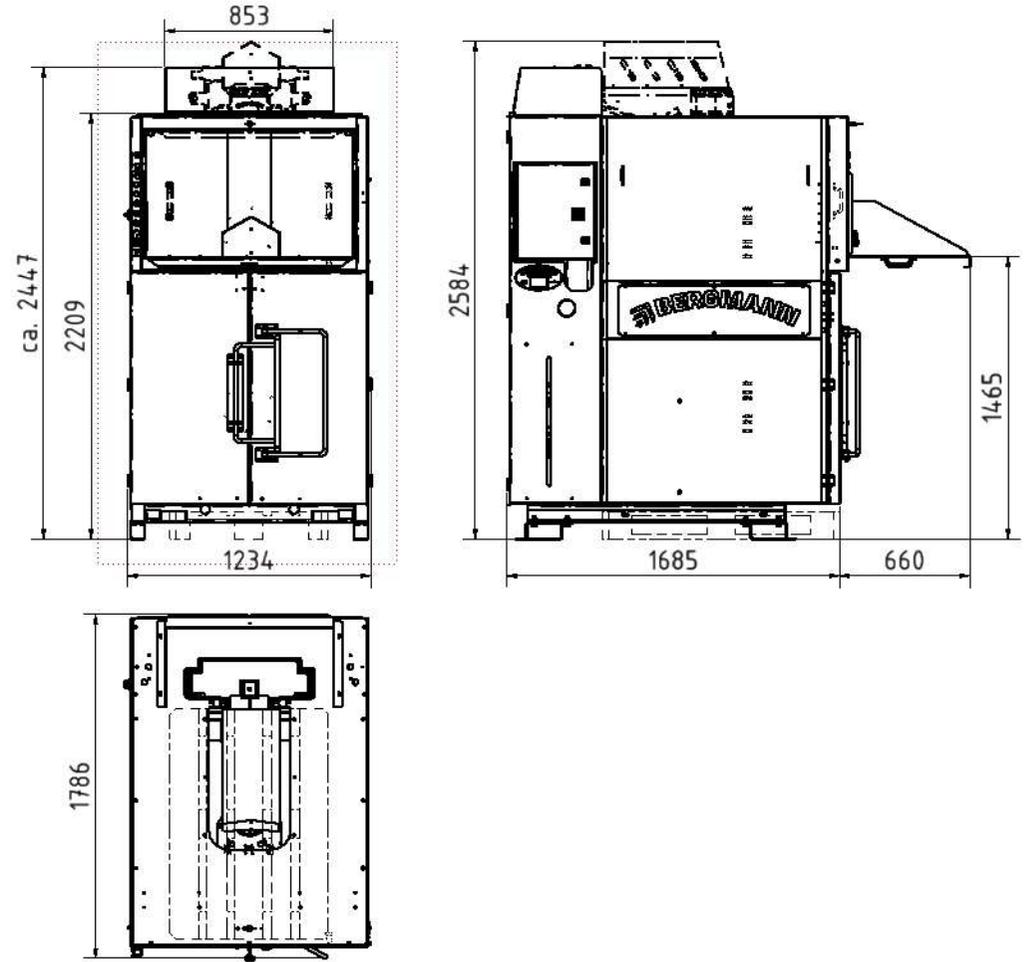

## Technical Data

All measurements are approx. Measurements. Subject to changes.

power	3,0 kW	machine dimensions (width x dept x height in mm)	1232 x 1720 x 2470 (required space min.:1330mm)
electrical connection	400 V / 3Ph / 50Hz +N	bale dimensions (width x depth x height in mm)	1100 x 1200 x 1100 (equals to approx. 1400 Liter)
control voltage	24 V	max. height with extended compaction unit	2580 mm without roof cover (2600mm mit Haube)
drum speed	15 to 35 U/min	filling height	1890 mm (faceplate, 45°-chute) resp. 1470 mm (filling chute)
machine wight	1130 kg	filling opening with accessory filling chute	660 mm x 1090 mm
noise level	69 dB	transport dimensions	1232 x 1720 x 2470 (required space min.:1330mm)
Pre-fuse	3 x 16A		