




## WASTE COMPACTORS FOR CHAIN LIFT TRUCKS

### High efficiency and the latest state of technology



■ MPC 10 P/E/Rm

#### Standard RAL-colours

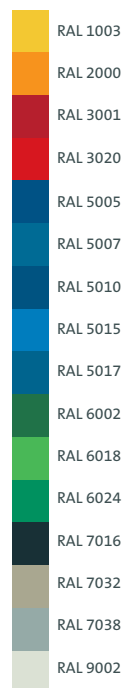

Further RAL-colours on demand at extra charge.

### Go for flexibility

You will get your waste compactor optionally...

- ... with slanted or high side walls as well as with individual opening mechanisms
- ... with weighing system
- ... with 4-point locking system
- ... with retaining plate
- ... with web based message system for location and filling level indication
- ... for stand-alone or ramp installation


### Your advantages:

- ✓ Reduced disposal costs
- ✓ Solid construction
- ✓ Long life



■ MPC 10 P/E with weighing system (optional)

■ MPC 10 P/E with 4-point locking system (optional)

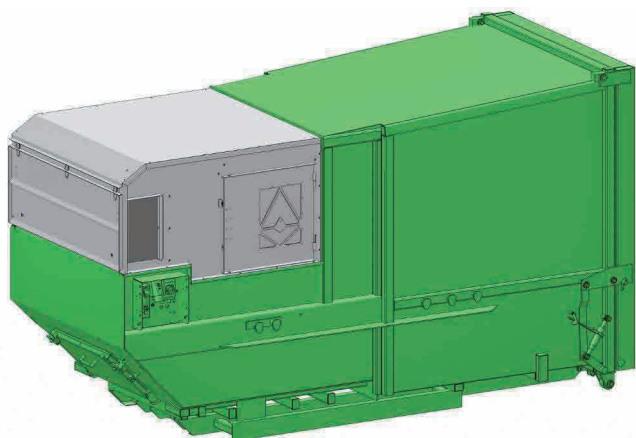

## Optimum transportation and efficiency

AVERMANN waste compactors reduce household and industrial waste volumes as well as paper and other recyclable fractions to 1/6 of the original volume and thus reduce transport and disposal costs extraordinarily economical.

A highlight is the integrated weighing system available as an option. With this unit, the disposal costs can be proportionally accounted for weight and calculated accordingly.

### Technical data

	MPC 5 P/E	MPC 8 P/E	MPC 10 P/E	MPC 12 P/E
Net capacity	5 m <sup>3</sup>	8 m <sup>3</sup>	10 m <sup>3</sup>	12 m <sup>3</sup>
Machine length	3610 mm	4110 mm	4415 mm	4920 mm
Machine width	1970 mm	1970 mm	2040 mm	2040 mm
Machine height	1870 mm	2300 mm	2500 mm	2500 mm
Feed-opening length	670 mm	670 mm	1000 mm	1000 mm
Feed-opening width	1620 mm	1620 mm	1570 mm	1570 mm
Feeding height	1230 mm	1230 mm	1420 mm	1420 mm
Dead weight	2560 kg	2800 kg	3430 kg	3560 kg
Oil quantity	30 l	30 l	60 l	60 l
Capacity per drive stroke	0.7 m <sup>3</sup>	0.7 m <sup>3</sup>	1.0 m <sup>3</sup>	1.0 m <sup>3</sup>
Cycle time (idle)	27 sec	27 sec	43 sec	43 sec
Drive capacity	5.5 kW	5.5 kW	5.5 kW	5.5 kW
Press force	200 kN	200 kN	380 kN	380 kN

### Valid for all machine types

Electricity: 3 x 400 V, N, PE/50 Hz; Plug connector: CEE-5 x 32 A/6 h; Fuse protection (on site): 25 A, slow;  
Control voltage: 24 V DC