



## Roto-Compactor PS 800 -E


Continuous filling also during compaction operation.  
 For use directly on site where the waste is generated.  
 Compaction into a plastic bag.  
 For the compaction of recyclable waste and residual waste.

### Technical Details:

The continuously fillable Roto-Compactor has a specially equipped compaction drum which rotates alternating right and left. It grips, tears up and compacts the material into a 800 liter plastic bag with pallet underlaid that is protected by a steel casing it can be easily removed. The full signal is affected by a yellow signal in the keyboard on the machine's front. Paint on customer's request in every RAL colour.

### Serial Accessories

- \* compaction drum: GP 800 drum
- \* filling by chute
- \* 2K-paint in RAL 6018 yellowgreen

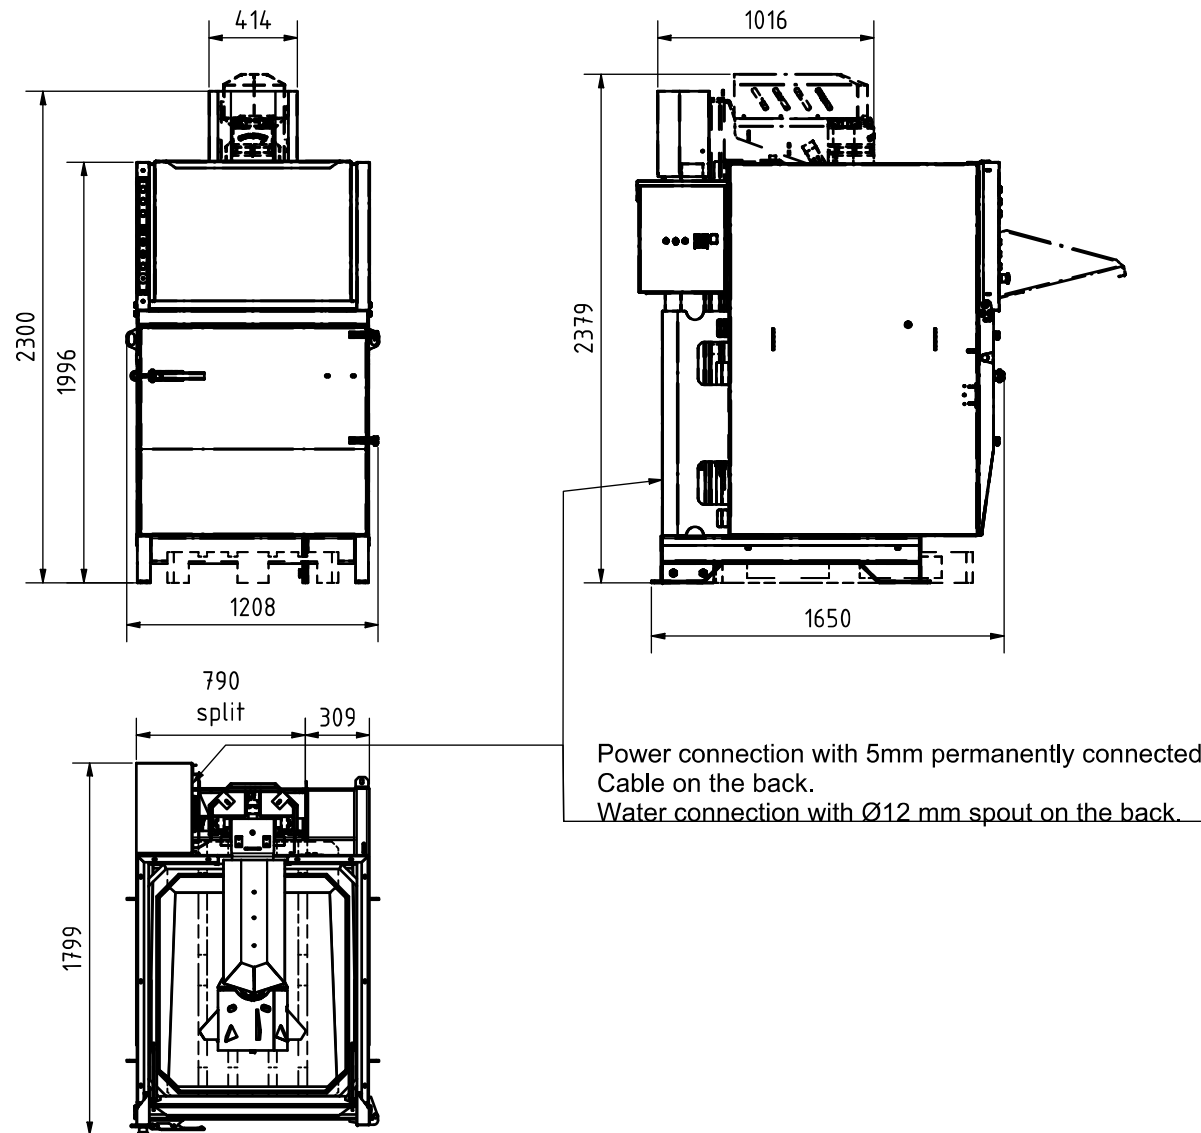

## Technische Daten / Technical data

Alle Maßangaben sind ca.-Werte. Technische Änderungen vorbehalten.  
 All dimensions are approximate values. Technical changes reserved.

power	3,0 kW	machine dimensions (width x depth x height in mm)	1155 mm x 1642 mm x 1970 mm (required space min.: 1250mm)
electrical connection	400 V / 3Ph / 50 Hz +N	bale dimensions (width x depth x height in mm)	950 mm x 1000 mm x 900 mm (equals to approx 800 Liter)
control voltage	24V	max. height with extended compaction unit	2360 mm without roof cover (2470 mm with cover)
drum speed	30 U/min	filling height	1480 mm (filling chute)
machine weight	940 kg		
noise level	64 dB		
pre-fuse	3 x 16A		

Index 000 /